



WALL PANEL & DECKING

EXTERIOR

SINGLE WALL PANEL

FINISHING
PANEL



WIDTH : 125 mm

HEIGHT : 40 mm

LENGTH : 2900 mm



Waterproof



Humidity Prevention



Nonflammable



Sound insulation



UV Resistance



Thermal Insulation



DOUBLE COLOR SINGLE WALL PANEL

STARTING
PANEL



WIDTH : 125 mm

HEIGHT : 40 mm

LENGTH : 2900 mm




Waterproof



Humidity Prevention



Nonflammable



Sound insulation



Uv Resistance



Thermal Insulation



DOUBLE WALL PANEL



WIDTH : 232 mm

HEIGHT : 35 mm

LENGTH : 2900 mm



Waterproof



Humidity Prevention



Nonflammable



Sound insulation



UV Resistance



Thermal Insulation



KITKAT RIBBLE WALL PANEL



WIDTH : 180 mm

HEIGHT : 28 mm

LENGTH : 2900 mm



Waterproof



Humidity Prevention



Nonflammable



Sound insulation



Uv Resistance



Thermal Insulation



SIDING WALL PANEL



WIDTH : 141 mm

HEIGHT : 18 mm

LENGTH : 2900 mm



Waterproof



Humidity Prevention



Nonflammable



Sound insulation



UV Resistance



Thermal Insulation



SIDING WALL PANEL WITH GROOVE



WIDTH : 148 mm

HEIGHT : 18 mm

LENGTH : 2900 mm




Waterproof



Humidity Prevention



Nonflammable



Sound insulation




Uv Resistance



Thermal Insulation




SEPARATOR PROFILE (40/75)

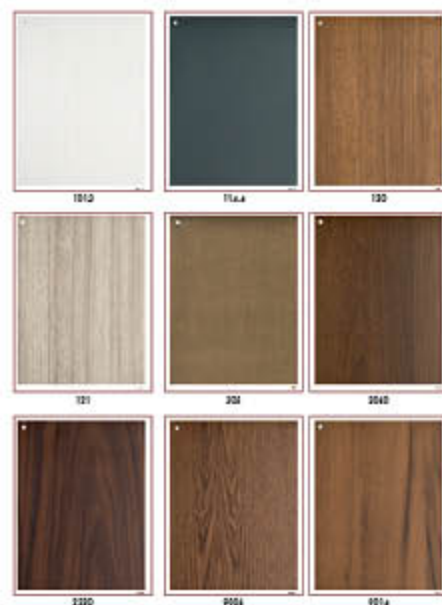

WIDTH : 75 mm

HEIGHT : 40 mm

LENGTH : 2900 mm

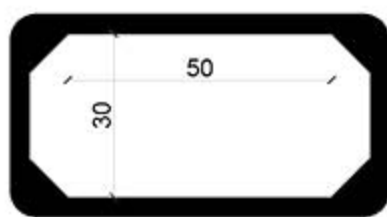

Waterproof



Humidity Prevention



Nonflammable



Sound insulation



UV Resistance



Thermal Insulation



SEPARATOR PROFILE (40/100)



WIDTH : 100 mm

HEIGHT : 40 mm

LENGTH : 2900 mm



Waterproof



Humidity Prevention



Nonflammable




Sound insulation



UV Resistance



Thermal Insulation

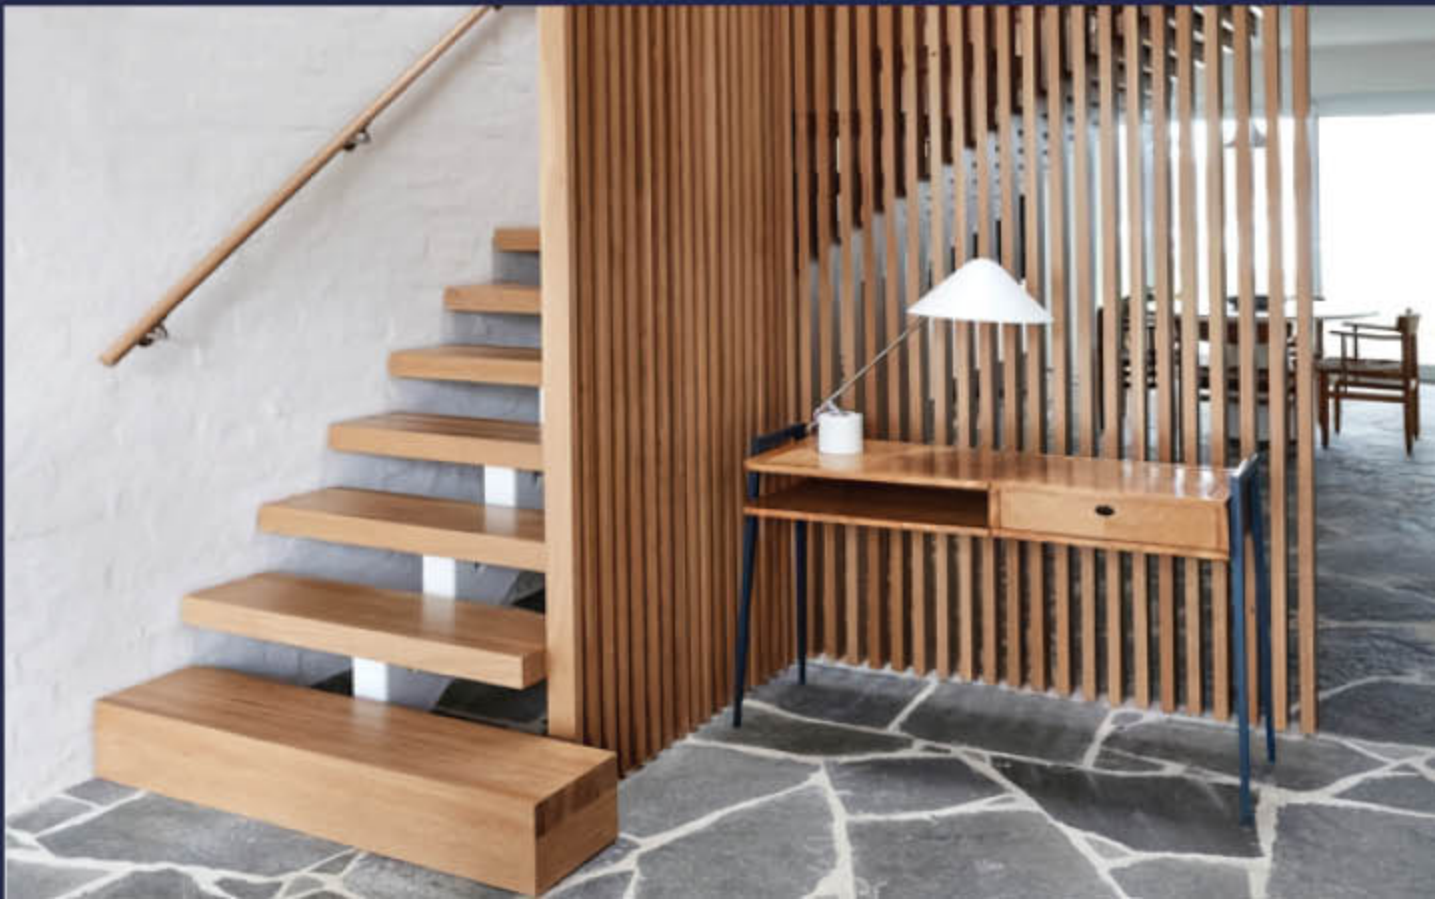


PERGOLA RAFTER PROFILE (60/140)



WIDTH : 140 mm

HEIGHT : 60 mm

LENGTH : 2900 mm

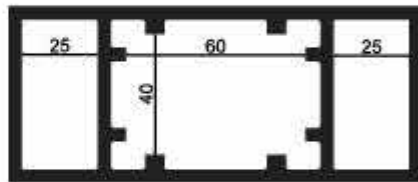

Waterproof



Humidity Prevention



Nonflammable



Sound insulation



UV Resistance



Thermal Insulation




PERGOLARAFTERPROFILE (60/220)



WIDTH : 220 mm

HEIGHT : 60 mm

LENGTH : 2900 mm

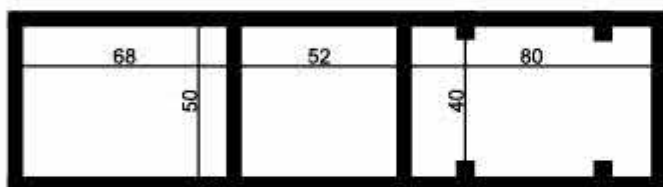

Waterproof



Humidity Prevention



Nonflammable



Sound insulation



UV Resistance



Thermal Insulation




PERGOLA MAST PROFILE (100/100)



WIDTH : 100 mm

HEIGHT : 100 mm

LENGTH : 2900 mm



Waterproof



Humidity Prevention



Nonflammable



Sound insulation



UV Resistance



Thermal Insulation




PERGOLA MAST PROFILE (140/140)



WIDTH : 140 mm

HEIGHT : 140 mm

LENGTH : 2900 mm



Waterproof



Humidity Prevention



Nonflammable



Sound insulation



Uv Resistance



Thermal Insulation



FENCE PANEL PROFILE (22/160)



WIDTH : 160 mm

HEIGHT : 22 mm

LENGTH : 2900 mm



Waterproof



Humidity Prevention



Nonflammable



Sound insulation



Uv Resistance



Thermal Insulation





(RAFTER COVER)



(BEAM COVER)



(STICK FLANGE)



(STICK TOP COVER)



(U PROFILE)



(L PROFILE)



WIDTH : 60 mm
HEIGHT : 40 mm
LENGTH : 2900 mm

(CORNER CLOSING PROFILE)

COMPOSITE DECKING



WIDTH : 140 mm

HEIGHT : 24 mm


LENGTH : 2900 mm



COLOR OP-



(LIGHT BROWN DECK)



(ANTHRACITE GREY DECK)



(DARK BROWN DECK)



(TEAK DECK)



not affected by water



environmentally friendly



Antibacterial



recycleable



easy assembling




does not cause flames



(CLOSING THE STAIRCASE
CORNER DECK)



WIDTH : 140 mm
HEIGHT : 55,5 mm
THICKNESS : 24 mm
LENGTH : 2900 mm

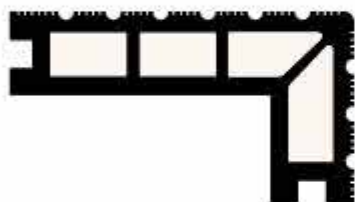

(DECK L CORNER CLOSING)




WIDTH : 40 mm
HEIGHT : 30 mm
LENGTH : 2900 mm



(CARCASS PROFILE)



WIDTH : 40 mm
HEIGHT : 30 mm
LENGTH : 2900 mm

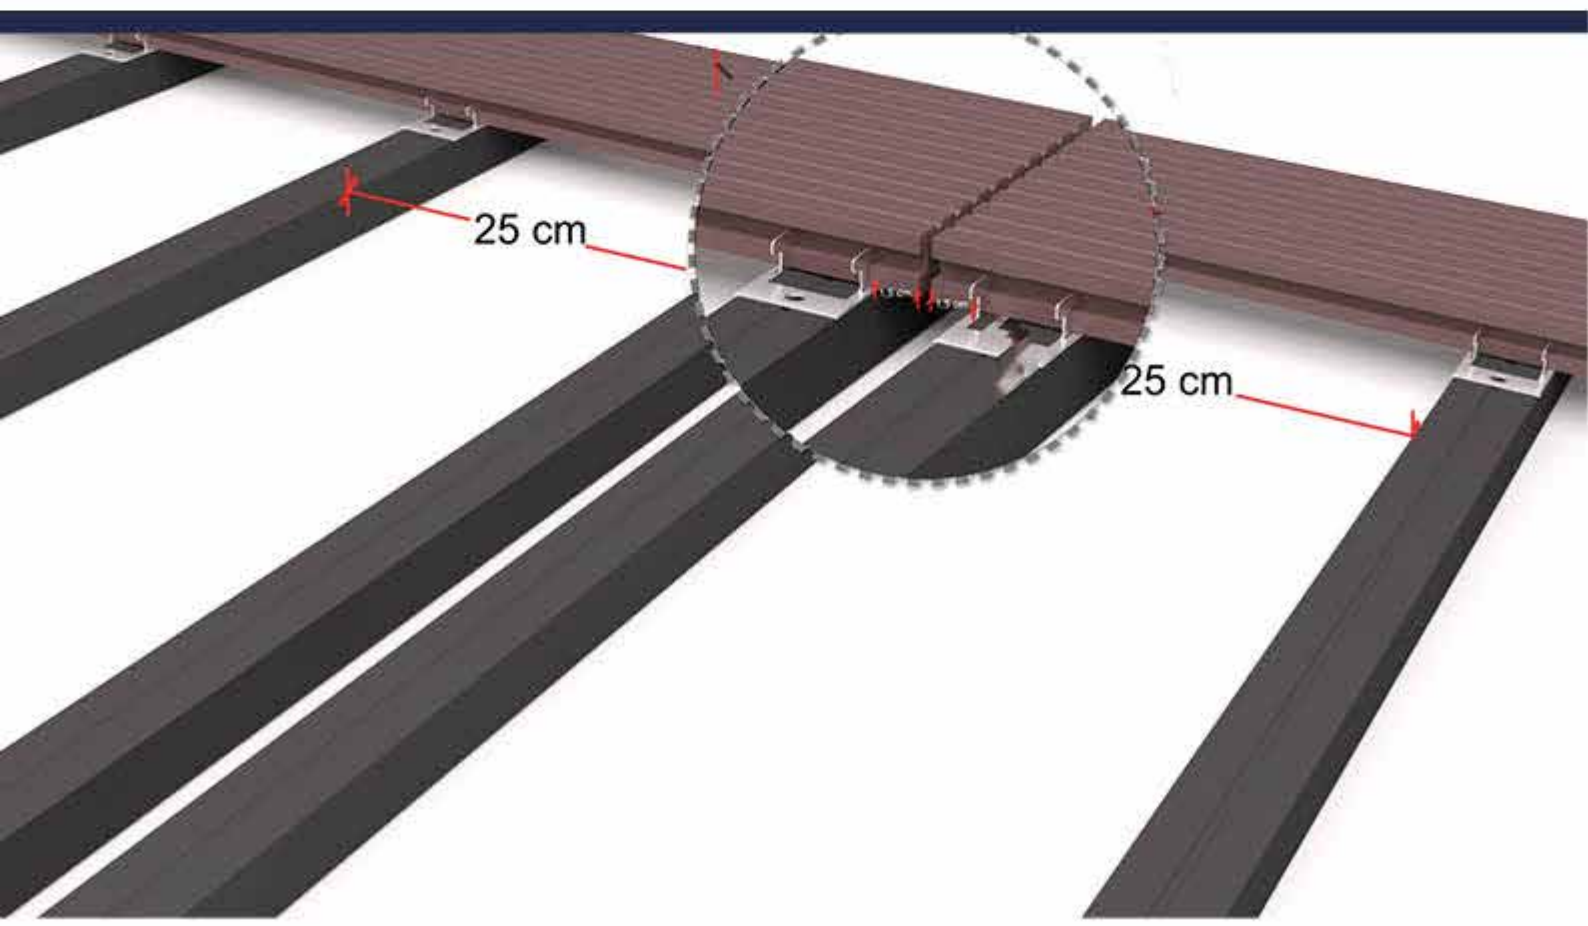

*Breezes From
Nature*

WALLUKS
AWAKE YOUR WALLS

WWW.WALLUKS.COM.TR